

Application

Model DM access doors employ a fully removable dual-panel-door to provide a convenient and economical means to obtain access to components in ductwork utilized in low, medium, and high pressure and velocity applications.

Standard Construction

Door Panel: 22 ga. (0.85) [20 ga. (1.0) for doors > 12" x 8" (305 x 203)] galvanized steel – precision stamped.

Gasket: Compressible closed cell neoprene – door panel to duct.

Knobs: Molded polypropylene with metal threaded inserts – hand adjustable.

Available sizes: 10" x 6" (254 x 152)
12" x 8" (305 x 203)
18" x 14" (457 x 356)
24" x 18" (610 x 457)


Ratings

UL 94 Flammability Rating: HF1

Maximum System Pressure: + 20" wg. (+5.0 kPa), -10" wg. (-2.5 kPa).

Leakage: None

Temperature: -20°F to 200°F (-29°C to 93°C)

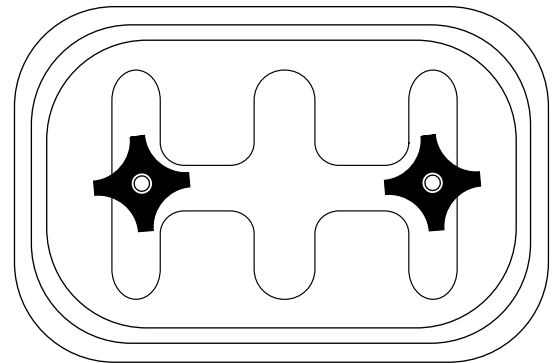

Model **DM**
(standard)

