

## Application

Model DMR access doors employ a fully removable dual-panel-door to provide a convenient and economical means to obtain access to components in round ductwork utilized in low, medium, and high pressure and velocity applications.

## Standard Construction

**Door Panel:** 22 ga. (0.85) [20 ga. (1.0) for duct > 14" (356)] galvanized steel – precision stamped.

**Gasket:** Compressible closed cell neoprene – door panel to duct.

**Knobs:** Molded polypropylene with metal threaded inserts – hand adjustable.

**Minimum Size:** 5" Ø (127 Ø)

**Maximum Size:** 28" Ø (711 Ø)


## Ratings

**UL 94 Flammability Rating:** HF1


**Maximum System Pressure:** + 20" wg. (+5.0 kPa), -10" wg. (-2.5 kPa).

**Leakage:** None

**Temperature:** -20°F to 200°F (-29°C to 93°C)

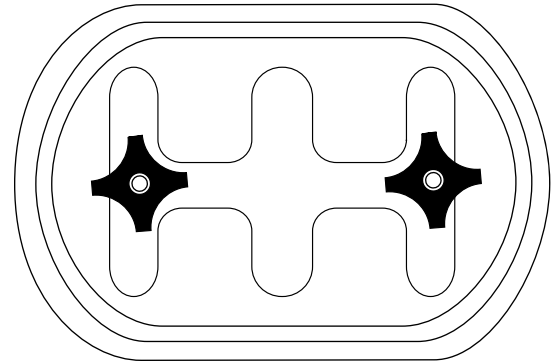

Model **DMR**  
(standard)

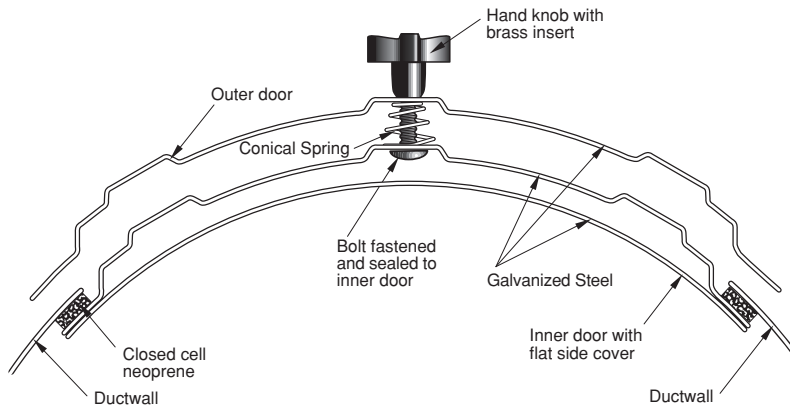

Duct Diameter	Door Panel Size (W x H)
5" (127) ≤ D ≤ 6" (152)	8" x 4" (203 x 102)
7" (178) ≤ D ≤ 9" (229)	8" x 4" (203 x 102)
10" (254) ≤ D ≤ 11" (279)	12" x 8" (305 x 203)
12" (305) ≤ D ≤ 14" (356)	12" x 8" (305 x 203)
15" (381) ≤ D ≤ 16" (406)	16" x 12" (406 x 305)
18" (457) ≤ D ≤ 20" (504)	16" x 12" (406 x 305)
22" (559) ≤ D ≤ 24" (610)	16" x 12" (406 x 305)
26" (660) ≤ D ≤ 28" (711)	16" x 12" (406 x 305)