

### Application

The HZ-200 equipment screen offers a unique concealed support system that ensures proper structural support while maintaining a true continuous horizontal blade look without the use of unsightly frames or vertical angles. The HZ-200 is available in a wide array of finishes including custom color matching.

### Standard Construction


- Material:** Mill finish 6063-T5 extruded aluminum.
- Frame:** 2" × 1 1/2" × 0.081" thick (51 × 38 × 2) angle.
- Blades:** 0.081" (2) thick horizontal cladding style.
- Mullion:** Visible.
- Minimum Size:** 12" × 12" (305 × 305).
- Maximum Size:** Single section: 72" × 144" (1829 × 3658).  
 144" × 72" (3658 × 1829).  
 Multiple section: Unlimited

### Options

- Factory finish:
  - High Performance Fluoropolymer - 100% resin Newlar®/ 70% resin Kynar®
  - Baked Enamel
  - Clear or Color Anodized, Class 1
  - Prime Coat
- Welded construction.
- Hinged frame.


### Ratings

**Free Area:** [48" × 48" (1222 × 1222) unit]: 3.1 ft<sup>2</sup> (0.29 m<sup>2</sup>)  
 19.4%

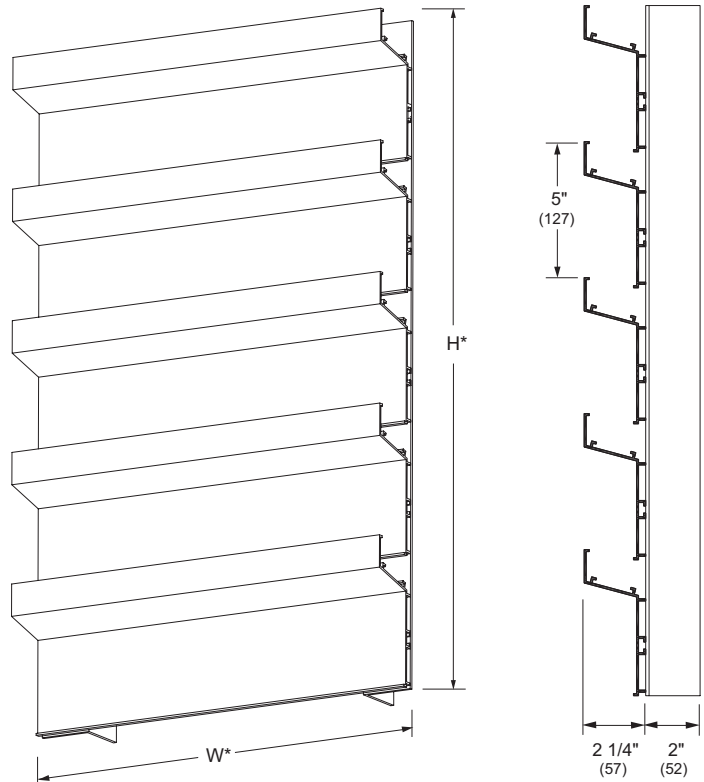


**Model HZ-200**  
 (standard)  
 \*Dimensions furnished  
 approximately 1/2" (13) undersize.

**Vertical Section**

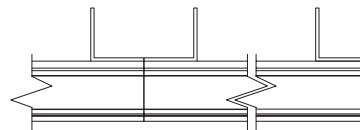

**Vertical Mullion**  
 (standard)



**Horizontal Mullion**  
 (standard)

Extruded Aluminum Louvers HZ200 (1/1) January 2010