

## Application

Model PW access panels employ a hinge door panel to provide a convenient and economical means to obtain access to components behind plastered surfaces.

## Standard Construction

**Frame:** 1" x 1<sup>3</sup>/<sub>4</sub>" x 16 ga. (25 x 45 x 1.6) phosphate dipped steel flange with grey prime coat finish - complete with <sup>3</sup>/<sub>4</sub>" plaster ground.

**Door Panel:** 14 gauge (2.0) phosphate dipped steel with grey prime coat finish.

**Hinge:** Concealed – continuous piano type.


**Latches:** Steel – screwdriver operated cam type.

**Minimum Size:** 12" x 12" (305 x 305)


**Maximum Size:** 24" x 24" (610 x 610)

## Options

- Cylinder key lock, flush mounted.
- 3" (76) wide expansion wings.

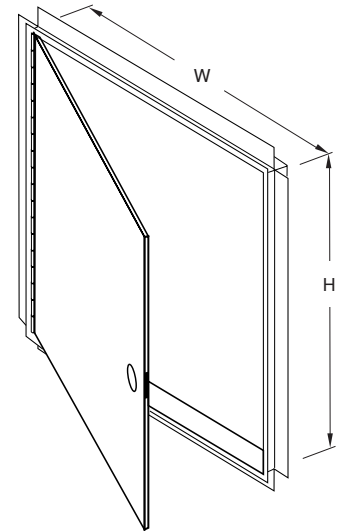

Model **PW**  
(standard)

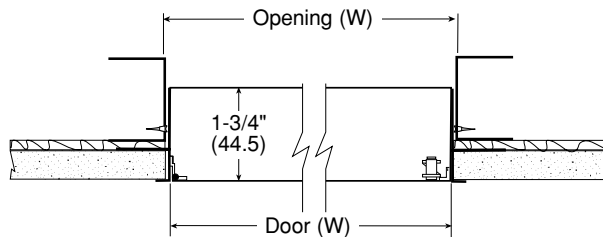

Model **PW** Typical Wall Installation

Door Size W x H	Opening Size W x H	Number of Latches
12" x 12" (305 x 305)	12 <sup>1</sup> / <sub>4</sub> " x 12 <sup>1</sup> / <sub>4</sub> " (311 x 311)	1
16" x 16" (406 x 406)	16 <sup>1</sup> / <sub>4</sub> " x 16 <sup>1</sup> / <sub>4</sub> " (413 x 413)	1
16" x 20" (406 x 508)	16 <sup>1</sup> / <sub>4</sub> " x 20 <sup>1</sup> / <sub>4</sub> " (413 x 514)	1
18" x 18" (457 x 457)	18 <sup>1</sup> / <sub>4</sub> " x 18 <sup>1</sup> / <sub>4</sub> " (463 x 464)	1
24" x 24" (610 x 610)	24 <sup>1</sup> / <sub>4</sub> " x 24 <sup>1</sup> / <sub>4</sub> " (616 x 616)	4