


The following installation details apply to models **RCS-10**, **RCS-10R**, and **RCS-42**

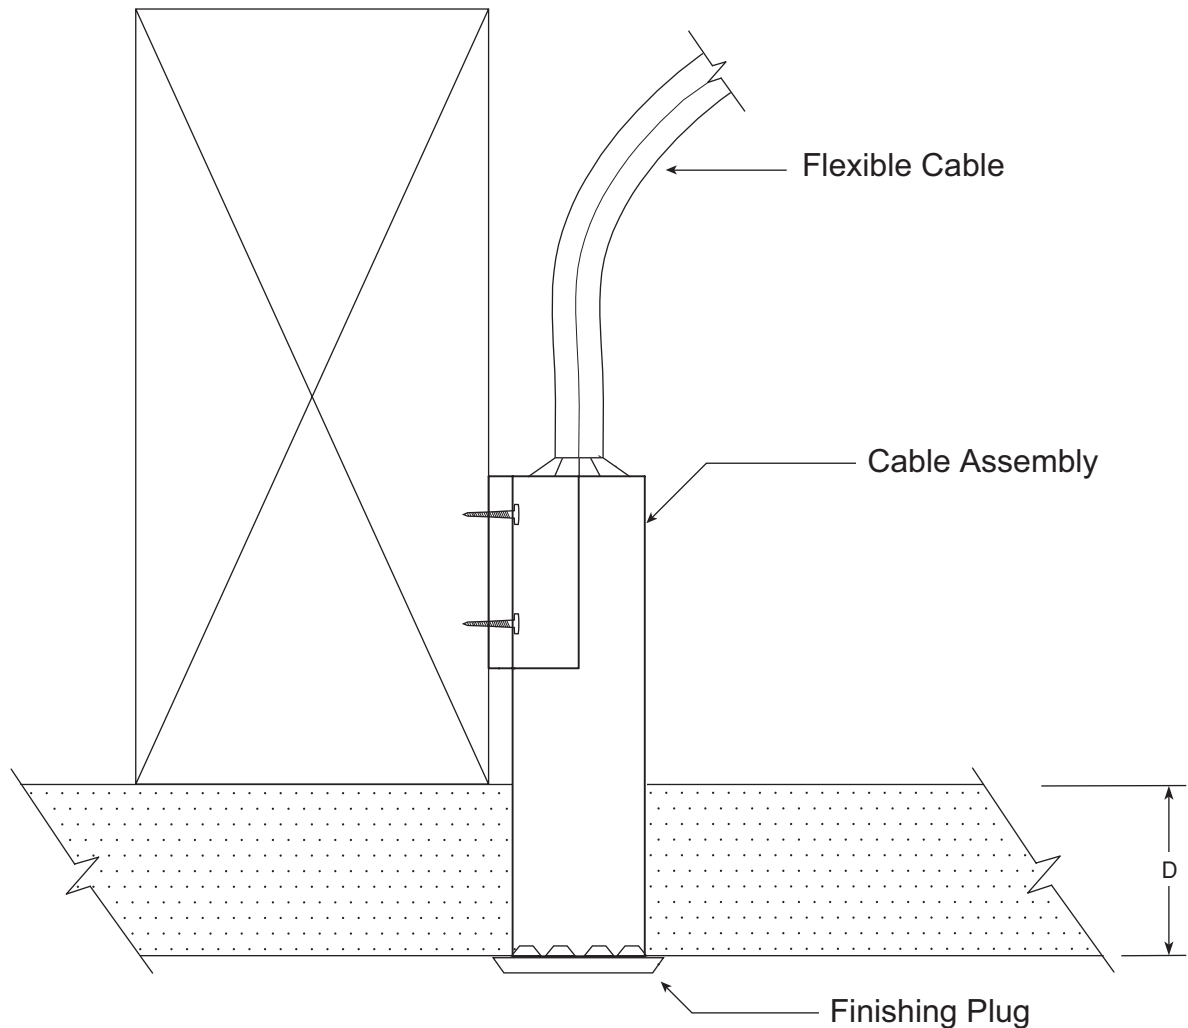

1. Install damper in duct as required.
2. Untape RCS-10, 10R, or 42 Cable assembly. Place RCS-10, 10R, or 42 where it is going to be mounted.
3. Screw or nail the mounting bracket to ceiling stud. Set depth (D) at correct level for ceiling thickness.
4. Support cable sleeve with plastic clips as necessary to prevent twisting.
5. Cut drywall or tile to fit tight to <sup>15</sup>/<sub>16</sub>" plastic tubing.
6. Cover plastic tubing with finishing plug.
7. Caution - do not cover operating assembly with any type of duct insulation.

**NOTE:** RCS-10, 10R, or 42 comes completely assembled. Includes damper, cable, remote control assembly, an allen wrench, plastic clips and finishing plug.