

Application

The SV-445 formed steel louver is designed for intake and exhaust application where line-of-sight protection is critical. The SV-445 is available in a wide array of painted finishes including custom color matching.

Standard Construction

Material: Galvanized steel.

Frame: 4" deep × 20 ga. thick (102 × 1) channel.

Blades: 45° × 20 ga. (1) thick chevron style.

Screen: 1/2" × 0.063" (12.7 × 1.6) expanded and flattened aluminum.

Mullion: Visible.

Minimum Size: 12" × 12" (305 × 305)

Maximum Size: Single section: 60" × 120" (1524 × 3048)
120" × 60" (3048 × 1524)
Multiple section: Unlimited

Options



- Factory finish:
 - Polyester Powder
 - Baked Enamel
 - Prime Coat
- 1 1/2" (38) flange frame.
- Welded construction.
- Alternate bird or insect screens.
- Insulated or non-insulated blank-off panels.
- Filter racks.
- Hinged frame.
- Heavy duty 16 ga. (1.6) construction.
- 304 stainless steel construction.

Ratings

Free Area: [48" × 48" (1222 × 1222) unit]: 6.1 ft² (0.56 m²)
38.0%

Performance @ Beginning Point of Water Penetration

Free Area Velocity: 600 fpm (3.05 m/s)
Air Volume Delivered: 3,648 cfm (1.72 m³/s)
Pressure Loss: 0.25 in.wg. (62 Pa)

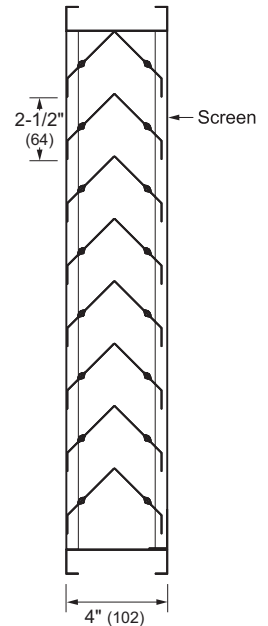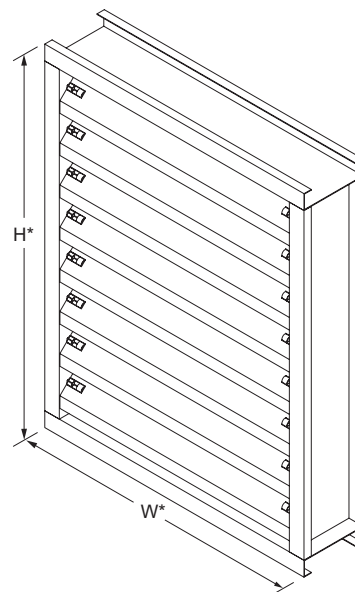


Model **SV-445**
(standard)


*Louver dimensions furnished approximately 1/2" (13) undersize.

Vertical Section

†Screen adds approximately 3/16" (5) to louver depth.

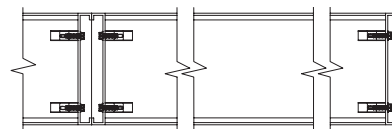


Vertical Mullion
(standard)



Horizontal Mullion
(standard)

Mullion Cover
(supplied loose for field installation)



Flange Frame
(optional)