

Application

Model WB access panels employ a hinge door panel to provide a convenient and economical means to obtain access to components behind drywall surfaces. The WB access panels are designed to fit between wood and steel stud spacing used in drywall type construction.

Standard Construction

Frame: 1" x 1-³/₄" x 16 ga. (25 x 45 x 1.6) phosphate dipped steel flange with grey prime coat finish - complete with mounting holes.

Door Panel: 14 gauge (2.0) phosphate dipped steel with grey prime coat finish.

Hinge: Concealed – continuous piano type.


Latches: Steel – screwdriver operated cam type.

Minimum Size: 10" x 10" (254 x 254)


Maximum Size: 22" x 30" (559 x 762)

Options

Cylinder key lock, flush mounted.

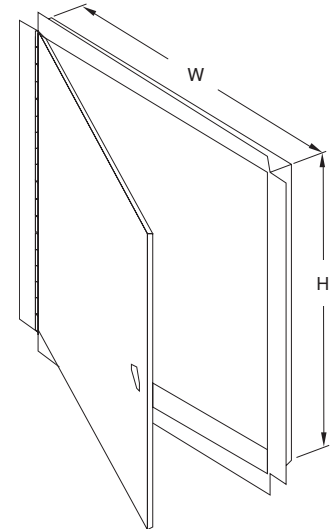

Model **WB**
(standard)

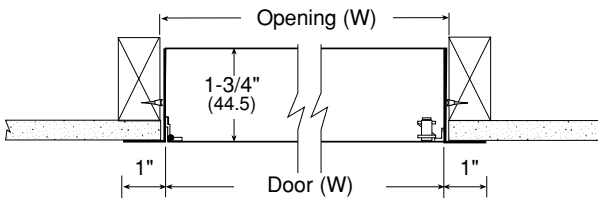

Model **WB** Typical Wall Installation

Door Size W x H	Opening Size W x H	Number of Latches
10" x 10" (254 x 254)	10 ¹ / ₂ " x 10 ¹ / ₂ " (267 x 267)	1
12" x 12" (305 x 305)	12 ¹ / ₂ " x 12 ¹ / ₂ " (318 x 318)	1
14" x 14" (356 x 356)	14 ¹ / ₂ " x 14 ¹ / ₂ " (368 x 368)	1
18" x 18" (457 x 457)	18 ¹ / ₂ " x 18 ¹ / ₂ " (470 x 470)	1
22" x 22" (559 x 559)	22 ¹ / ₂ " x 22 ¹ / ₂ " (572 x 572)	3
22" x 30" (559 x 762)	22 ¹ / ₂ " x 30 ¹ / ₂ " (572 x 775)	4
24" x 24" (610 x 610)	24 ¹ / ₂ " x 24 ¹ / ₂ " (622 x 622)	3