

Application

Model TM and TMS access panels employ a hinge door panel to provide a convenient and economical means to obtain access to components behind masonry, tile, and drywall surfaces.

Standard Construction

Frame: 1" x 1³/₄" x 16 ga. (25 x 45 x 1.6) phosphate dipped steel flange with grey prime coat finish [model TMS are 18 ga. (1.3) #4 satin finish stainless steel]

Door Panel: 14 gauge (2.0) phosphate dipped steel with grey prime coat finish [model TMS are 18 ga. (1.3) #4 satin finish stainless steel].

Hinge: Concealed – continuous piano type.


Latches: Steel – flush screwdriver operated cam type.

Minimum Size: 8" x 8" (203 x 203)


Maximum Size: 36" x 36" (914 x 914)

Options

Cylinder key lock, flush mounted.

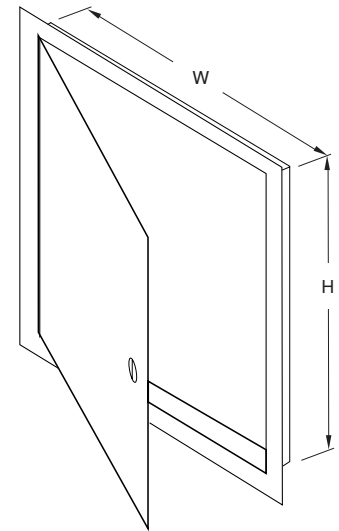

Model **TM**
(standard)

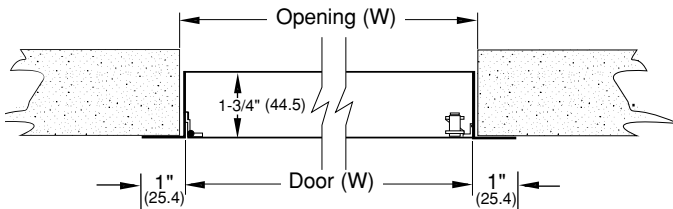

Model **TM** Typical Wall or Ceiling Installation

Door Size W x H	Opening Size W x H	Number of Latches
8" x 8" (203 x 203)	8 ³ / ₈ " x 8 ³ / ₈ " (213 x 267)	1
8" x 12" (203 x 305)*	8 ³ / ₈ " x 12 ³ / ₈ " (213 x 314)	1
10" x 10" (254 x 254)	10 ³ / ₈ " x 10 ³ / ₈ " (264 x 264)	1
12" x 12" (305 x 305)	12 ³ / ₈ " x 12 ³ / ₈ " (314 x 314)	1
12" x 16" (305 x 406)*	12 ³ / ₈ " x 16 ³ / ₈ " (314 x 416)	1
12" x 18" (305 x 457)*	12 ³ / ₈ " x 18 ³ / ₈ " (314 x 467)	1
12" x 24" (305 x 610)*	12 ³ / ₈ " x 24 ³ / ₈ " (314 x 619)	2
14" x 14" (356 x 356)	14 ³ / ₈ " x 14 ³ / ₈ " (365 x 365)	1
16" x 16" (406 x 406)*	16 ³ / ₈ " x 16 ³ / ₈ " (416 x 416)	1
16" x 20" (406 x 508)	16 ³ / ₈ " x 20 ³ / ₈ " (416 x 518)	1
18" x 18" (457 x 457)	18 ³ / ₈ " x 18 ³ / ₈ " (467 x 467)	1
20" x 24" (406 x 610)*	20 ³ / ₈ " x 24 ³ / ₈ " (518 x 619)	2
20" x 30" (406 x 762)*	20 ³ / ₈ " x 30 ³ / ₈ " (518 x 518)	4
22" x 30" (559 x 762)	22 ³ / ₈ " x 30 ³ / ₈ " (568 x 772)	4
24" x 24" (610 x 610)*	24 ³ / ₈ " x 24 ³ / ₈ " (619 x 619)	4
24" x 30" (610 x 762)	24 ³ / ₈ " x 30 ³ / ₈ " (619 x 772)	5
24" x 36" (610 x 914)	24 ³ / ₈ " x 36 ³ / ₈ " (619 x 924)	5
30" x 30" (762 x 762)*	30 ³ / ₈ " x 30 ³ / ₈ " (772 x 772)	5
36" x 36" (914 x 914)*	36 ³ / ₈ " x 36 ³ / ₈ " (924 x 924)	5

*Model TM only.